

16^{PR}

16 Ply Rating

GT Radial Commercial Truck Tires feature rugged 16 ply construction for load capacity and durability (most sizes).

72^{MO}

Limited Warranty

GT Radial Commercial Truck Tires are covered by a 72 Month Warranty & Casing Warranty. See website for details.



SmartWay Verified

Giti Tire Manufactures SmartWay Verified Technologies.
Learn more at epa.gov/smartway

Limited Casing Warranty

- 1- The casings of GT Radial Commercial Truck Tires are warranted when the tire becomes unserviceable due to factors within manufacturer's control.
- 2- The following casing allowance will be applied to GT Radial Commercial Truck Tires in normal over the road service and produced after January 1, 2017.

SIZE	1st RETREAD	2nd RETREAD
445/50R22.5	\$130.00	\$100.00
295/75R22.5, 11R22.5	\$80.00	\$70.00
285/75R24.5, 11R24.5	\$80.00	\$70.00
315/80R22.5	\$80.00	\$70.00
385/65R22.5, 425/65R22.5	\$80.00	\$70.00
255/70R22.5	\$65.00	\$50.00
225/70R19.5, 245/70R19.5	\$30.00	\$20.00
215/75R17.5, 235/75R17.5	\$30.00	\$20.00

- 3- The above Casing Warranty will be valid through the second (2nd) retread for 72 months from the date of manufacture, whichever comes first.
- 4- Tires used in mining and logging service are not covered under this warranty.
- 5- The Limited Casing Warranty is subject to the terms and conditions as set forth by GITI Tire (USA), Ltd.

Exclusions For Casing Warranty:

- a. Casings which can not be retreaded due to excessive tread wear.
- b. Casings that have already been retreaded more than twice.
- c. Casing presented for warranty adjustment more than 6 years after the manufacturing date, based on tire DOT serial number.
- d. Failures resulting from faulty or incorrect retread processing or materials.
- e. Tires which have the original DOT or retreader's DOT numbers removed or are rendered illegible.
- f. Costs of retreading services or materials are specifically excluded.

Commercial Product Warranty:

Free replacement during first 2/32 of tread wear for defects in material and workmanship for 72 months from date of tire manufacture. See website or printed warranty for complete details.

Disclaimer:

Any implied warranties, including warranties of merchantability and fitness for a particular use, shall be limited in duration to the above period. To the extent permitted by law GITI shall not be responsible incidental or consequential damages, such as loss of use of the tire or of the vehicle on which it is used, inconvenience or commercial loss.

This is the only expressed warranty applicable to GT Radial Commercial Truck Tires and supersedes the terms of any previous warranty. GITI neither assumes nor authorizes anyone to assume for it any warranty.



GTRADIALCOMMERCIAL.COM

GT Radial reserves the right to change construction, materials or specifications without notice or obligation.


5144042-01-23

COMMERCIAL

PRODUCT LINE

2023



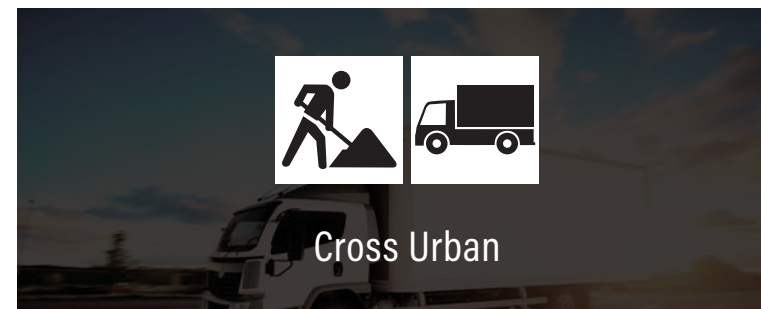

Steer / All Position



GSR 135^{FE}
 11R22.5 (16PR)
 295/75R22.5 (16PR)
 255/70R22.5 (16PR)
 11R24.5 (16PR)
 285/75R24.5 (16PR)



GSR 139
 225/70R19.5 (14PR)
 245/70R19.5 (16PR)



GAM535
 11R22.5 (16PR)
 315/80R22.5 (22PR)
 11R24.5 (16PR)



GAM876
 385/65R22.5 (18PR)
 425/65R22.5 (20PR)



Drive Position



GSR 135^{FE}
 11R22.5 (16PR)
 295/75R22.5 (16PR)
 255/70R22.5 (16PR)
 11R24.5 (16PR)
 285/75R24.5 (16PR)



GDR335^{FE}
 11R22.5 (16PR)
 295/75R22.5 (16PR)
 11R24.5 (16PR)
 285/75R24.5 (16PR)



GDR668
 11R22.5 (16PR)
 295/75R22.5 (16PR)
 11R24.5 (16PR)
 285/75R24.5 (16PR)



GDL933FS
 445/50R22.5 (20PR)



GDR339
 225/70R19.5 (14PR)
 245/70R19.5 (16PR)



GAM535
 11R22.5 (16PR)
 315/80R22.5 (22PR)
 11R24.5 (16PR)



GAM876
 385/65R22.5 (18PR)
 425/65R22.5 (20PR)



GSR 139
 225/70R19.5 (14PR)
 245/70R19.5 (16PR)



Trailer Position



GSR 135^{FE}
 11R22.5 (16PR)
 295/75R22.5 (16PR)
 255/70R22.5 (16PR)
 11R24.5 (16PR)
 285/75R24.5 (16PR)



GTR750^{FE}
 11R22.5 (16PR)
 295/75R22.5 (16PR)
 255/70R22.5 (16PR)
 11R24.5 (16PR)



GTR955
 215/75R17.5 (16PR)
 235/75R17.5 (16PR)



GTL933FS
 445/50R22.5 (20PR)



GAM535
 11R22.5 (16PR)
 315/80R22.5 (22PR)
 11R24.5 (16PR)



GAM876
 385/65R22.5 (18PR)
 425/65R22.5 (20PR)